


OFFICE BOOTHS

Meet Up 1-10

Last Update | August 2021

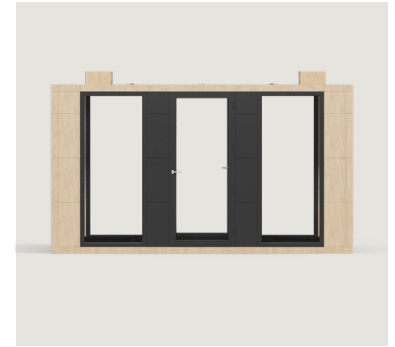

Silence & freedom to focus on what matters.

Comfortable privacy for confidential conversations.

Office booth with the highest sound isolation in the market. Studiobricks has been perfecting its sound control technology for over 11 years to give you the superpower of silence!

Fits up to 10 people*

Perfect for high productive meetings, video conferences, presentations or as a quiet resting space.

This model is part of Studiobricks Focus Spaces, larger customized sound isolation spaces. Ideal for conferences, presentations, focused work and calls. Let's build the perfect space for your team.

* The occupancy suggestions are for guidance only. Depending on your social distancing protocols and policies the occupancy limits may vary.

Measurements

Outside (WxLxH)	348 x 408 x 247 cm (11.4 x 13.4 x 8 ft)
Inside (WxLxH)	330 x 390 x 210 cm (10.8 x 12.8 x 6.9 ft)
Minimum ceiling height	250 cm (8.2 ft)
Weight	2.123 kg (4,680 lb)

Structure

Wall thickness	8 cm (3.5 in)
Ecofriendly material	Yes

- Double skin pressed from several layers of fire retardant EZ (Carb2) MDF & acoustic foam.
- Non-invasive wood-glue is used to adhere layers.
- No use of mineral wool or other destructive inputs.
- Interior acoustic (100% polyester) absorbers are fixed tightly with neutral silicone.
- Water-based paint, no use of solvents.

Fire safety	Yes (see FAQ on webpage).
CE mark	The whole booth is CE certificated.
Award	Leap in Time Future Proof Office 2019.
Virlab Seismic Qualification Certificate 203143C - Earthquake test	Passed successfully.
ISO 9001:2015	Studiobricks has passed the Quality management systems certification process successfully.
ISO 14001:2015	Studiobricks passed successfully the Environmental management systems certification process.
TÜV SÜD Indoor Air Quality Test	Successfully passed the VOC Testing.



**100% Freedom
0% Disturbances**



OFFICE BOOTHS

Meet Up 1-10

Isolation

Two-way sound isolation	Yes
Acoustic measurement (dB)	45 dB (view report from independent laboratory)
<ul style="list-style-type: none"> Pleasant room acoustics by the use of special acoustic absorbers (until α_w 0.9 (depending on the frequency) sound absorption coefficient (DIN EN ISO 354). Sound control glass door with dark grey aluminium frame and temperature/sound edge spacer. Block of silent laminated safety glass with air chamber 3+3+16+5+5 mm (0.1+0.1+0.6+0.2+0.2 in). With acoustic sealing through lifting up the door handle. 	



Standard Configuration

Color	White (RAL 9016), dark grey between windows (RAL 7016). 
Acoustic absorber	Recycled PET. Light grey. 
1 Sound control glass door	90 x 210 cm (35.4 x 82.7 in) sound proof with sound proof lock, right-hand opening to the outside. Anthracite aluminum frame with a block of silent laminated safety glass and temperature/sound edge spacer and air chamber: 3+3+16+5+5 mm (0.1+0.1+0.6+0.2+0.2 in). Acoustic sealing.
5 Sound control window	90 x 210 cm (35.4 x 82.7 in) with anthracite aluminum frame with a block of silent laminated safety glass and temperature/sound edge spacer with air chamber 3+3+16+5+5 mm (0.1+0.1+0.6+0.2+0.2 in).
Power connection	7 Power outlets: 3 outlets in an electricity column and 4 outlets through floor outlet cover box. Almost all country plugs available. Black connection cable 3 m length for power supply.
Soundproof ventilation	2 Active soundproof ventilation mufflers on the roof. Extremely quiet. Regulable speed. Connected to the occupancy sensor.
Integrated lighting	10 LED ceiling lights, connected to the occupancy sensor. Switch and regulation control on electricity column. 1620 lm per LED light.
Wi-fi/mobile	Wi-fi and cellular signals pass properly so that all devices can be used normally.
Carpet	Anthracite bound. Permanently antistatic.

Optional Equipment

Lacquer color	Ask us for other RAL or special finishing (chrome, copper, metallic...) 
Laminate	
Acoustic absorber color	
Customized height	Height can be increased or decreased in steps of 5 cm. Maximum internal height 330 cm.
Additional glass door (cross-ventilation)	Sound control door 90 x 210 cm.
Additional muffler	2 Additional soundproof ventilation mufflers on the roof.

Measurements

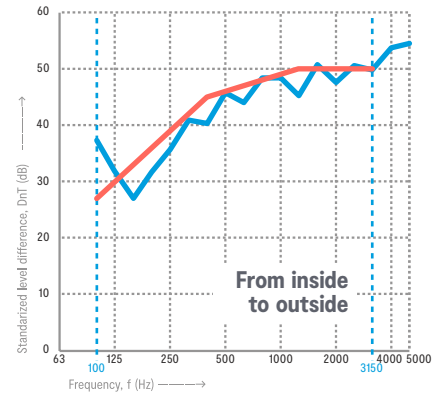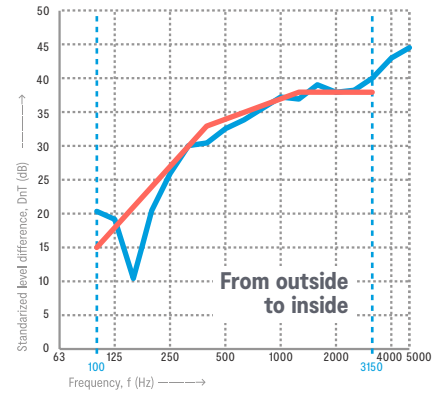

100% Freedom
0% Disturbances

OFFICE BOOTHS

Meet Up 1-10

Wheelchair accesible glass door with ramp	Ramp: 92 cm (36.2 in) width. 2 Door options available: glass sound control door (92 cm (36.2 in) width, 80 cm (31.5 in) inside width) or glass sound control door (97 cm (38.2 in) width, 85 cm (33.5 in) inside width).
Left-hand opening	Yes, opening to the outside.
Inward door opening	Yes, PVC frame only.
Lockable door	Yes
Frosted treated glass (no film)	Yes, on door or window.
Branding	Custom-made design solutions (in line with CI guidelines or adaptation to existing office).
Special coating	For trade shows and frequent (dis)assembly.
Additional windows / no windows	Yes (different standard sizes and made to measure solutions).
Skylight window	Yes, up to 8.
Ethernet port	Yes
ON AIR signal	Illuminates to indicate occupancy. Connected to sensor.
Additional floor outlet cover box with four plugs	Yes
TV bracket VESA, HDMI, power plug	Yes
Power supply through roof	Yes
Additional electric column	Yes
Ventilation kit inside booth to reduce height	Yes

Studiobricks S.L.

(Headquarters and factory)

C/ Segarra, 1, Pol. Ind. La Serra,

Lliçà de Vall, 08185 Barcelona, Spain

Phone: +34 93 8437459 / +34 605 627 128

info@studiobricks.com

www.studiobricks.com



100% Freedom
0% Disturbances